



GT-880

Installation Manual




Product information


Installation dimensions

Interface data

Installation dimensions

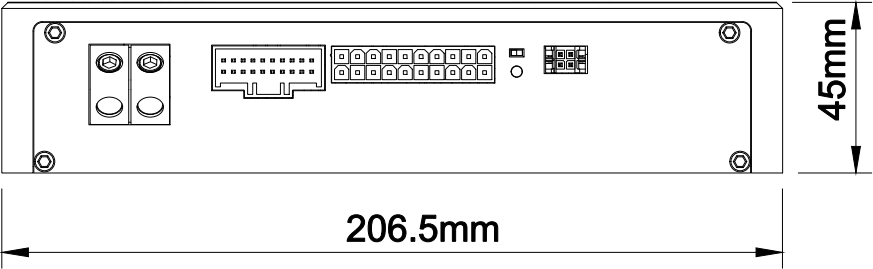

Device Connections

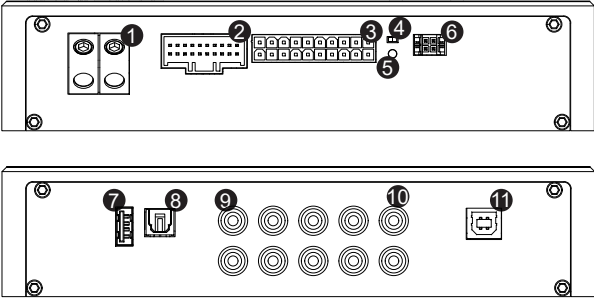

- 1. 12V Batt
- 2. High level input and output

OUT				INPUT					
RR+	RR-	RL+	RL-	FR-	FL-	RL-	RR-	GND	BATT
FL+	FL-	FR+	FR-	FR+	FL+	RL+	RR+	OUT REM	IN REM

- 3. High level input and output

OUT PUT						INPUT			
NC	NC	SPK8-	Spk7-	Spk6-	Spk5-	Spk6-	Spk5-	GND	GND
NC	NC	Spk8+	Spk7+	Spk6+	Spk5+	Spk6+	Spk5+	BATT+	BATT+

- 4. Startup mode
- 5. Power on indicator light
- 6. Remote
- 7. USB play
- 8. Opticalinput
- 9. AUX input
- 10. RCA Ooutput 1-8
- 11. PC Control

Device Connections

Power(DC): 10-16V

Input: High-level 8ch, 2xRCA, Optical/Coaxial,

Bluetooth5.2, USB Music Play

RCA Output: 10ch

Peak Power: 8x68W

Signal To Noise: $\geq 102\text{dB}$

Impedance: $2\Omega/4\Omega$

THD&Noise: $< 0.05\%$

Frequency response: $20\text{Hz} \sim 20\text{kHz}$

Dimension(LxHxW): 225x147x55mm

GERSTART is a trademark of Gerstart Audio.

© 2025 Gerstart Audio All Rights Reserved.

地址:广州市天河区中成北路8号酷车城D1栋(二楼)203室

电话: 400 183 8680 www.huishengaudio.com

