




GT-1212

Installation Manual


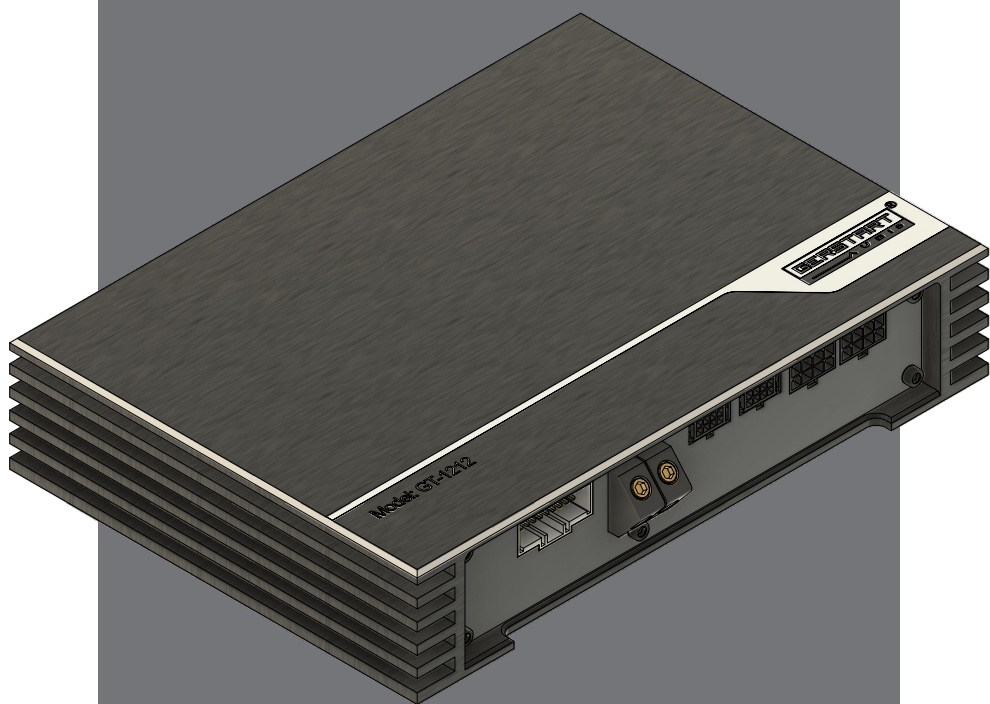


Product information



Installation dimensions

Interface data

Installation dimensions

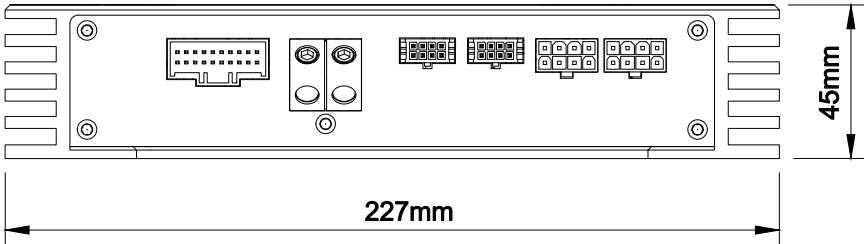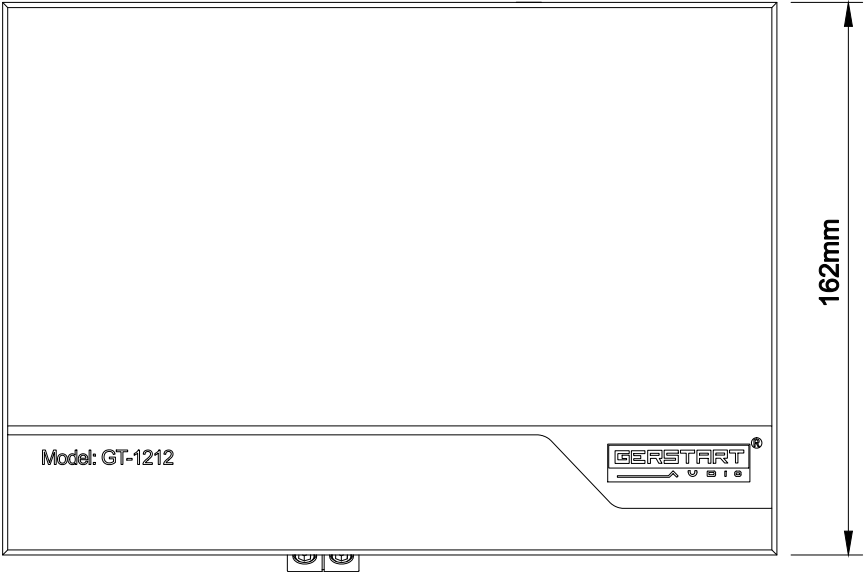

Device Connections

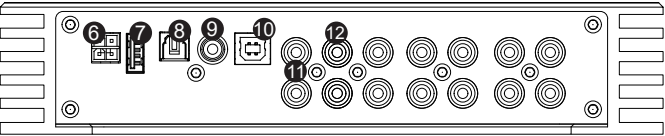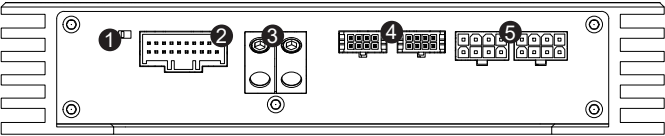

- 1. Start mode
- 2. High level input and output

OUT				INPUT					
RR+	RR-	RL+	RL-	FR-	FL-	RL-	RR-	GND	BATT
FL+	FL-	FR+	FR-	FR+	FL+	RL+	RR+	OUT	IN
								REM	REM

- 3. 12V Batt
- 4. High level input
- 5. High level output
- 6. Remote
- 7. USB play
- 8. Opticalinput
- 9. Coaxial
- 10. PC Control
- 11. AUX Input
- 12.RCA Ooutput 1-12

Device Connections

Power(DC): 10-16V

Input: High-level 12ch, 2xRCA, Optical, Coaxial

Bluetooth5.2, USB Music Play

RCA Output: 12ch

Peak Power: 12x68W

Signal To Noise: $\geq 102\text{dB}$

Impedance: $2\Omega/4\Omega$

THD&Noise: $< 0.05\%$

Frequency response: $20\text{Hz} \sim 20\text{kHz}$

Dimension(LxHxW): 227x162x45mm

GERSTART is a trademark of Gerstart Audio.

© 2025 Gerstart Audio All Rights Reserved.

地址:广州市天河区中成北路8号酷车城D1栋(二楼)203室

电话: 400 183 8680 www.huishengaudio.com

