



GT- 480

Installation Manual





Installation dimensions


Interface Information

Product Parameters

Installation dimensions

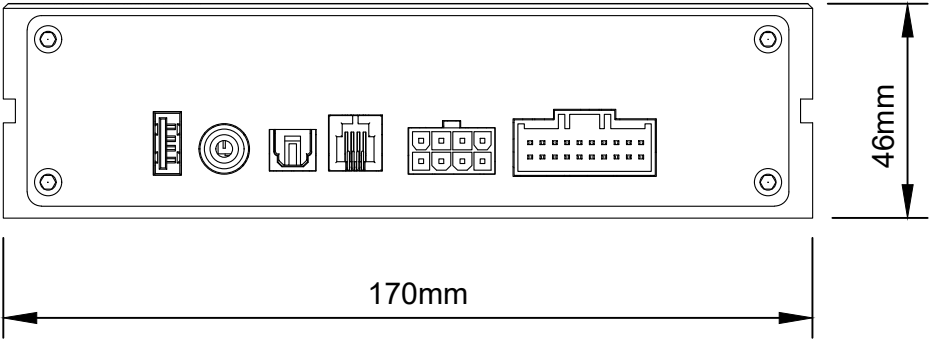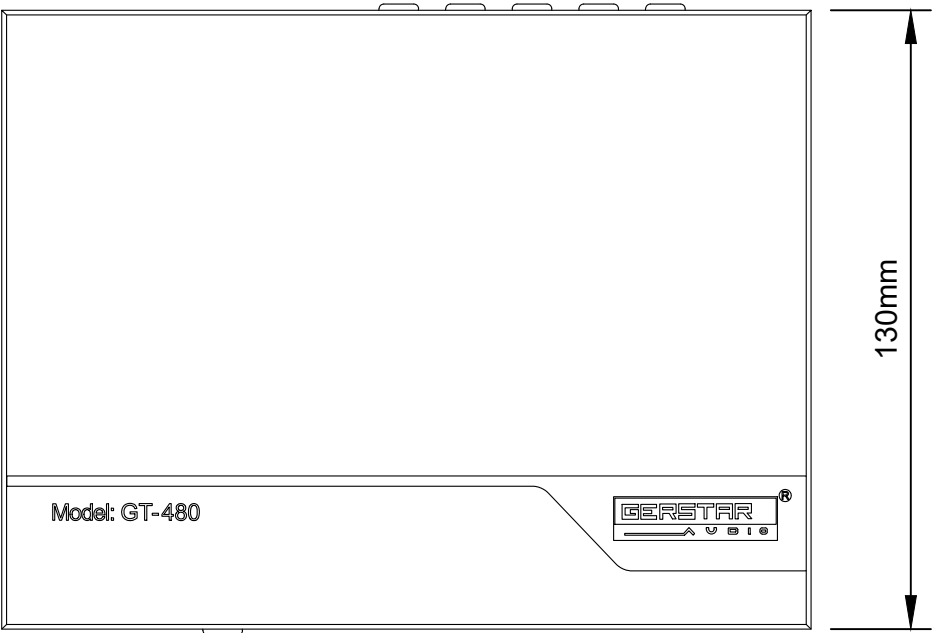

Interface Information

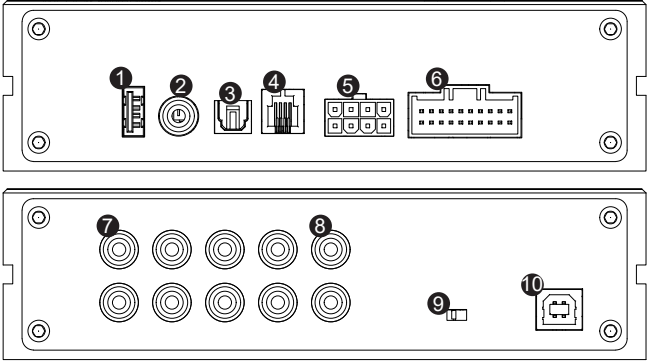

- 1. USB play
- 2. Coaxial
- 3. Opticalinput
- 4. Remote
- 5. HI level output 5-8CH
- 6.20 pin universal plug

OUT				INPUT					
RR+	RR-	RL+	RL-	FR-	FL-	RL-	RR-	GND	BATT
FL+	FL-	FR+	FR-	FR+	FL+	RL+	RR+	OUT	IN
								REM	REM

- 7. 8ChRCA level output
- 8. 2Ch RCA level Input
- 9. Start mode
- 10. PC Control

Product Parameters

Power(DC): 10-16V

Input: High-level 4ch, 8xRCA, Optical Coaxial

Bluetooth5.2, USB Music Play

RCA Output: 8ch

Peak Power: 8x50W

Signal To Noise: $\geq 105\text{dB}$

Impedance: $6\ \Omega$

THD&Noise: $< 0.05\%$

Frequency response: $20\text{Hz} \sim 20\text{kHz}$

Dimension(LxHxW): 170x130x46mm

GERSTART is a trademark of Gerstart Audio.

© 2025 Gerstart Audio All Rights Reserved.

地址:广州市天河区中成北路8号酷车城D1栋(二楼)203室

电话: 400 183 8680 www.huishengaudio.com

