



GT-680

Installation Manual





Installation dimensions


Interface Information

Product Parameters

Installation dimensions

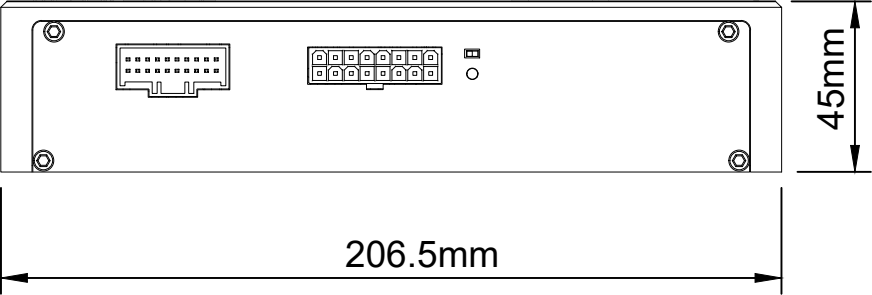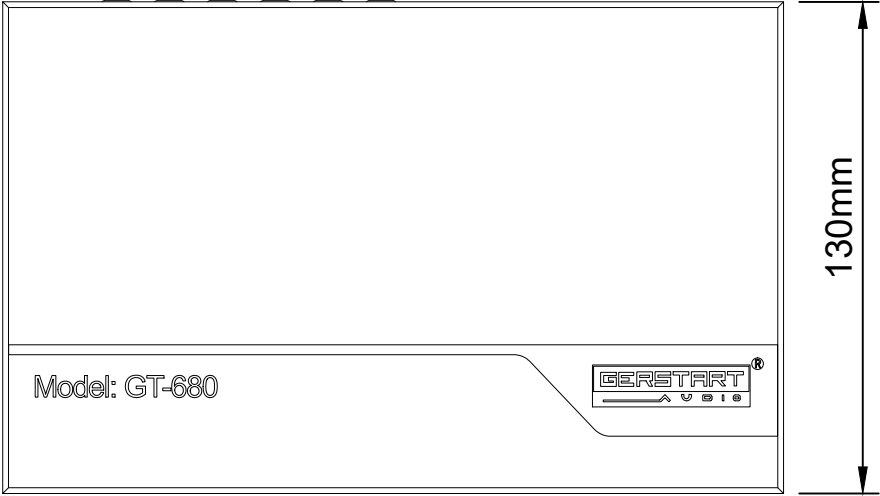

Interface Information

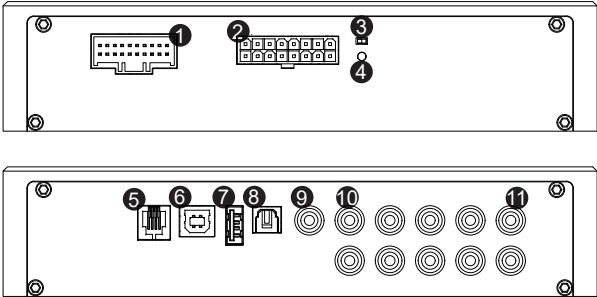

1. 20 pin universal plug

OUT				INPUT					
RR+	RR-	RL+	RL-	FR-	FL-	RL-	RR-	GND	BATT
FL+	FL-	FR+	FR-	FR+	FL+	RL+	RR+	OUT REM	IN REM

2. High level input and output

INPUT		OUTPUT					
SPK6-	Spk5-	Spk5-	Spk5-	Spk6-	Spk6-	GND	GND
Spk6+	Spk5+	Spk5+	Spk5+	Spk6+	Spk6+	BATT+	BATT+

3. Startup mode

4. Power on indicator light

5. Remote

6. PC Control

7. USB play

8. Opticalinput

9. Coaxial

10. AUX input

11. RCA Ootput 1-8

Product Parameters

Power(DC): 10-16V

Input: High-level 8ch, 2xRCA, Optical/Coaxial,

Bluetooth5.2, USB Music Play

RCA Output: 10ch

Peak Power: 6x68W+2x160W

Signal To Noise: $\geq 102\text{dB}$

Impedance: $6\ \Omega$

THD&Noise: $< 0.05\%$

Frequency response: 20Hz~20kHz

Dimension(LxHxW): 225x147x55mm

GERSTART is a trademark of Gerstart Audio.

© 2025 Gerstart Audio All Rights Reserved.

地址:广州市天河区中成北路8号酷车城D1栋(二楼)203室

电话: 400 183 8680 www.huishengaudio.com

