


User's Manual

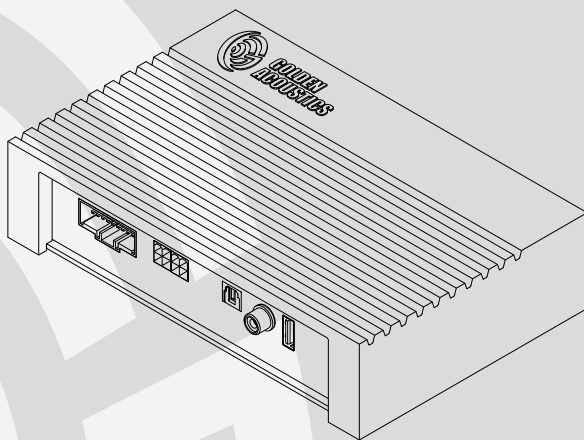

VE48S

Venus Series DSP

YOUR DSP

Dear Customer,

Congratulations on purchasing our GoldenAcoustics mobile system product for your sound system.

This product has been designed and manufactured to GoldenAcoustics's exacting standards to ensure many years of audio enjoyment. For the best performance, we recommend that you have your GoldenAcoustics product installed by an authorized GoldenAcoustics dealer.

If you would like to install this product on your own, we recommend for you to go through this manual to familiarize yourself with all the installation requirements and procedures.


If you encounter any issues or if you have any questions on the operation of this product, please contact your nearest authorized GoldenAcoustics dealer for assistance, or you may also contact us through our website or social media channels.

WHAT'S IN THE BOX


Check and identify the contents of your package:

1. Installation Manual x 1
2. Dsp VE48s x 1
3. 8pin cable x 1


Device Connections VE48S

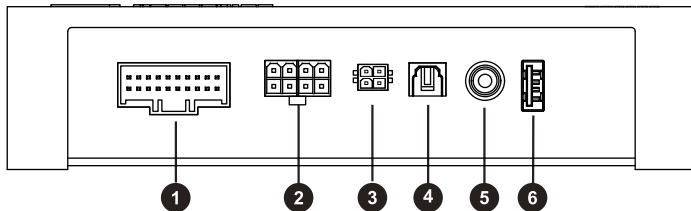

1. 12V wiring harness
2. 5-8 Hi output
3. Remote
4. Opticalinput
5. Coaxialinput
6. USP play
7. Pc control input
8. Turn on selector
9. RCA Input
10. RCA Output

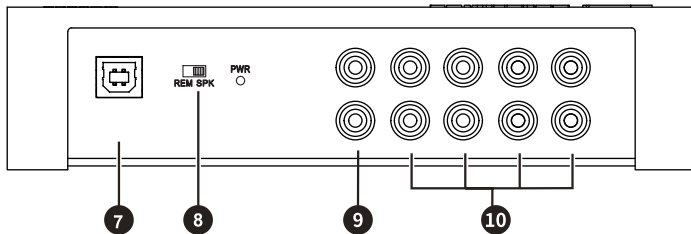

12V wiring harness

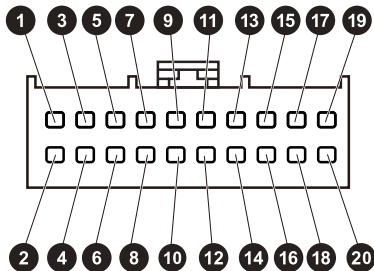

PIN	FUNCTION	PIN	FUNCTION
1	REM IN	11	FR+(Input)
2	12V+	12	FR-(Input)
3	REM OUT	13	FR+(Output)
4	GND	14	RL-(Output)
5	RR+(Input)	15	FR-(Output)
6	RR-(Input)	16	RL+(Output)
7	RL+(Input)	17	FL-(Output)
8	RL-(Input)	18	RR-(Output)
9	FL+(Input)	19	FL+(Output)
10	FL-(Input)	20	RR+(Output)

SPECIFICATIONS VE48S

Power(DC): 10-16V

Input: High-level 4ch, 2xRCA, Optical/Coaxial,

Bluetooth5.2, USB Music Play

RCA Output: 8ch

Peak Power: 8x50W

Signal To Nois: $\geq 102\text{dB}$


Impedance: $2\Omega/4\Omega$

THD&Noise: $< 0.05\%$


Frequency response: $20\text{Hz}\sim 20\text{kHz}$

Dimension(LxHxW): 182x118x43mm

Controlling the DSP

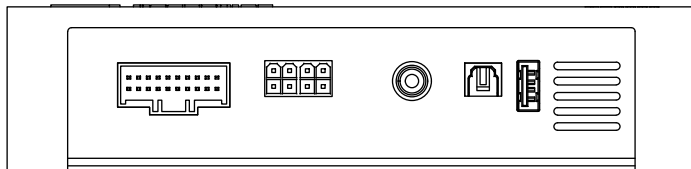


Connecting via USB to a Windows PC

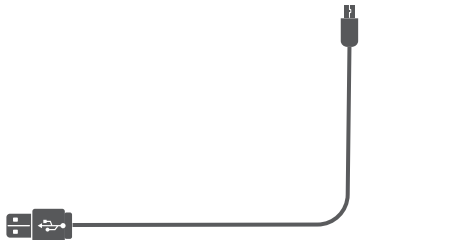

Bluetooth music

Connecting via Bluetooth to Phone

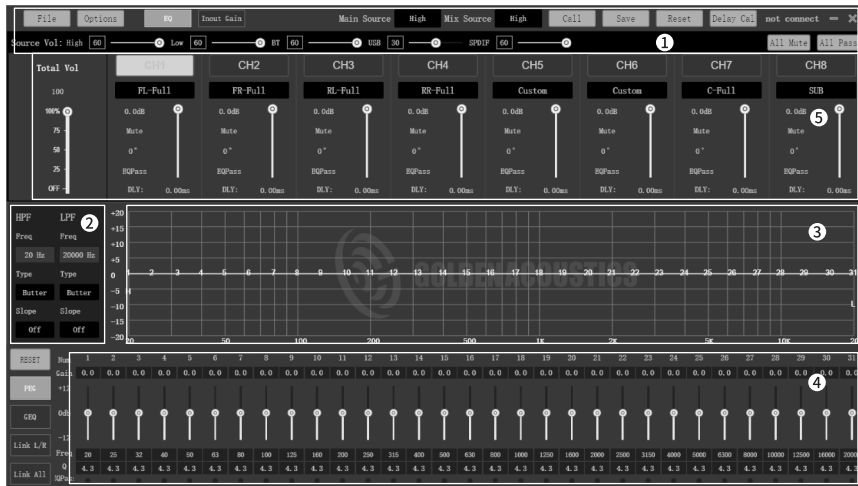

(1) Main menu editing area

Can be loaded and saved as computer scene files, load and save scene files of the whole machine; switch between Chinese and English, firmware update, about (check version number) and restore factory settings, etc..

(2) Filter editing area

Type of high-pass and low-pass filters, adjustable filter type, frequency and slope.

SUBSCRIBE FOR MORE INFO



Wechat
Public Account



Wechat
Channels



DouYin
Channels

WWW.HUISHENGAUDIO.COM

Copyright © 2026 GOLDEN ACOUSTISC All Rights Reserved.